PROJECT #22204

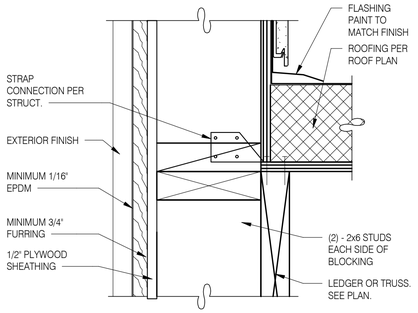

CON. @ STUD AND @ BLOCKING 3" = 1'-0" | 17



W.H. FLU / INTAKEN PIPE SUPPORT 3" = 1'-0" | 13

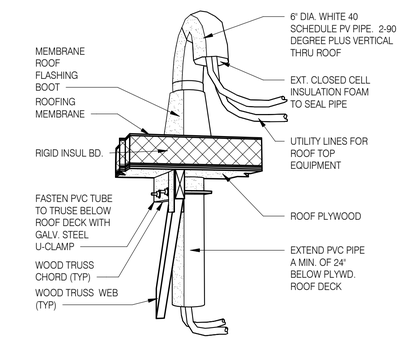

PIPE HOOD N.T.S. | 9

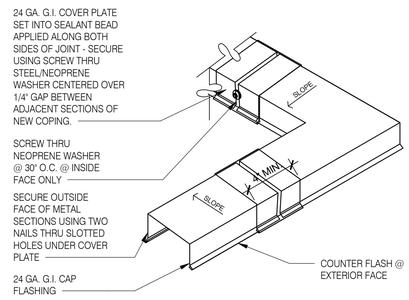

NOTE: JOINTS ARE TO OCCUR AT 10'-0" MAX.

COPING JOINT N.T.S. | 5



NOTES

1. NOT USED
2. FASTENERS USED TO ATTACH THE COPING TO WOOD NAILERS, MUST BE SPACED NO GREATER THAN 18 - INCHES ON-CENTER.
3. ALLOW FOR 1/8 - INCH EXPANSION GAP BETWEEN 10-FOOT LENGTHS OF COPING. PROVIDE A COPING JOINT COVERS BETWEEN ENDS OF COPING PIECES AND AT CORNERS. JOINT COVERS SHOULD BE MADE FROM THE SAME MATERIAL AS THE COPING AND SHOULD LAP THE JOINTS A MINIMUM OF 6" ON EITHER SIDE. JOINT COVERS SHALL BE FASTENED THE SAME WAY AS THE COPING.
4. FIBER CANT STRIP SLOPED 1/4:12 TOWARDS ROOF.
5. ROOF MEMBRANE
6. FACTORY PAINTED 24 GAUGE METAL COPING WITH 4" DROP FRONT, BACK AND ENDS (WHERE SHOWN).
7. CEMENT FIBER BOARD WALL FINISH: SEE EXTERIOR ELEVATIONS
8. 2x6 AND 2x8 TOP PLATE
9. 1/2" PLYWOOD SUBSTRATE. SEE SHEET A1.0 & S2.0 FOR ADDITIONAL DETAILS
10. BLUE SKIN VP WATER RESISTIVE AIR BARRIER MEMBRANE
11. 5/4x4 HARDIE BOARD TRIM

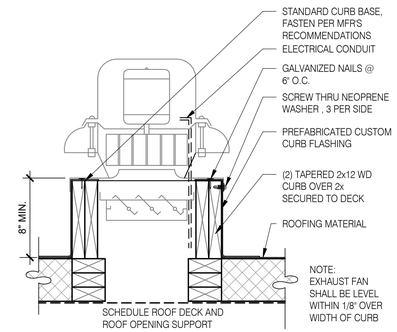

EXHAUST FAN CURB 3" = 1'-0" | 18

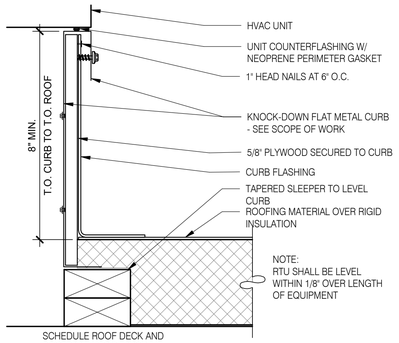

HVAC CURB 3" = 1'-0" | 14

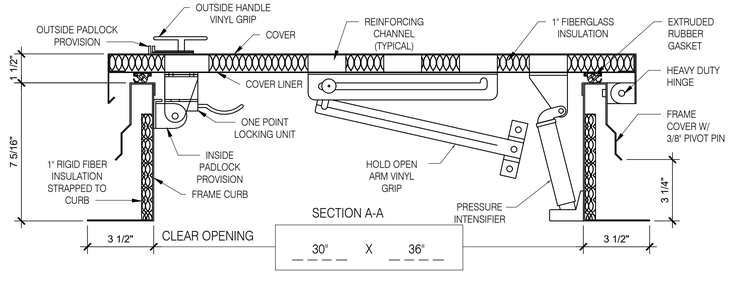

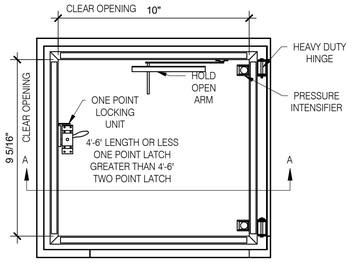

HATCH MATERIAL:

GALVANIZED STEEL (PRIME PAINTED)
COVER - 14 GA. GALV STEEL
FRAME COVER - 14 GA. GALV STEEL
FRAME CURB - 14 GA. GALV STEEL
COVER LINER - 22 GA. GALV STEEL

HATCH FINISH:

GALV - PRIME PAINTED

MANUFACTURER:

PRECISION LADDERS, LLC OR EQUAL

NOTES:

(1) ALL MOUNTING HARDWARE TO BE SUPPLIED BY OTHERS.

(2) FOR OPERATING EFFICIENCY, HATCH HARDWARE VARIES BY SIZE. EXAMPLE MODEL#: PH- A/G OPENING SIZE IN FEET-INCHES (PH-G2630)

ROOF LADDER AND HATCH 3" = 1'-0" | 7

PARAPET CAP - SIDING 3" = 1'-0" | 2

NOTE: G.C. TO PROVIDE BLOCKING AND INSTALL THE LADDER.

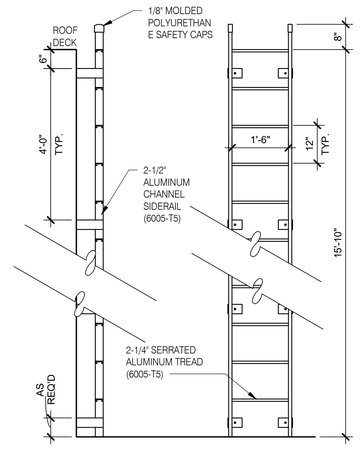



PLAN BRACKET DETAIL

EXHAUST FAN CURB 3" = 1'-0" | 19

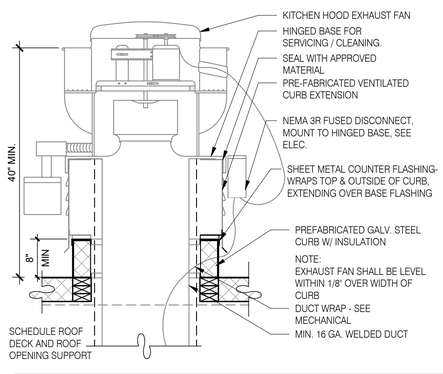

EXHAUST FAN CURB 3" = 1'-0" | 19

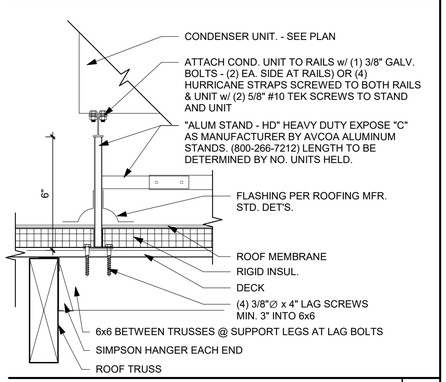

EQUIP. SUPPORT - ALUMASTAND 3" = 1'-0" | 15



CHANGE IN PARAPET ELEVATION 3" = 1'-0" | 20

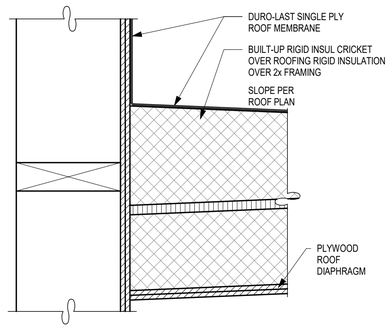

CRICKET 3" = 1'-0" | 16

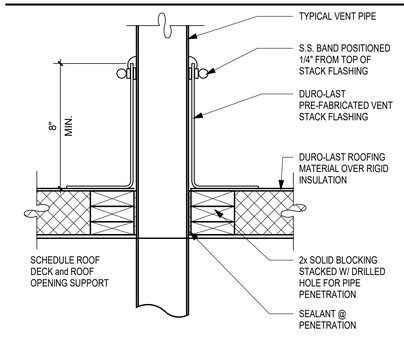

SEALED PIPE FLASHING 3" = 1'-0" | 12



LOUVER DETAIL 3" = 1'-0" | 8

ROOF LADDER N.T.S. | 4

NRD national restaurant designers
ARCHITECTS & ENGINEERS
7208 Ace Blvd. 2nd Floor Raleigh NC 27617
phone: 919.544.0087 fax: 919.544.9399
A Division of LMHT Associates

BRYAN L. JONES — REGISTERED ARCHITECT — No. 9852 — SOUTH CAROLINA

05.19.22

STATE OF SOUTH CAROLINA — LMHT ASSOCIATES, P.A. Morrisville, NC No. C84006 — REGISTERED ARCHITECTS

	DATE	REMARKS

CONTRACT DATE:	03/31/2022
BUILDING TYPE:	END. MED 40
PLAN VERSION:	SEPT. 2021
BRAND DESIGNER:	
SITE NUMBER:	315669
ENTITY NUMBER:	458169
PA/PM:	Approver
DRAWN BY.:	
JOB NO.:	22204

ENDEAVOR 2.0
SPEARS CREEK CHURCH RD (BY LIBERTY RIDGE DRIVE)
SOUTH CAROLINA 29229

TACO BELL

ENDEAVOR 2.0
CONSTRUCTION DETAILS ROOF

A6.0

PLOT DATE: 5/18/2022 2:21:59 PM

C:\Users\rawood\Documents\22204 Spears Creek_OWood.RVT

CAUTION: IF THIS SHEET IS NOT 22"x34" IT IS A REDUCED PRINT